


Gama Superconfort y Confort

Confort sin restricciones

Multi-posición
Instalación vertical
u horizontal



Gama Superconfort

Modelo	35 S3*	50 S3	80 S3	100 S3	120 S3	150 S3
Referencia	0010023306	0010023307	0010023308	0010023309	0010023310	0010023311
Eficiencia ACS	C	C	C	C	C	C
Perfil ACS	S	M	L	L	L	XL
Potencia (kW)	1.600	1.600	2.000	2.000	2.000	2.400
Capacidad (L)	35	50	80	100	120	150
Tiempo calent. 65°C (+50°C)	01:14	01:48	02:22	02:54	03:29	03:25
Peso vacío (kg)	15,7	19,3	23,7	26,8	30,7	35,0


Gama Confort

Modelo	30 C3*	50 C3	80 C3	100 C3	120 C3	150 C3
Referencia	0010023300	0010023301	0010023302	0010023303	0010023304	0010023305
Eficiencia ACS	C	C	C	C	C	C
Perfil ACS	S	M	L	L	XL	XL
Potencia (kW)	1.600	1.600	1.600	1.600	1.600	2.000
Capacidad (L)	35	50	80	100	120	150
Tiempo calent. 65°C (+50°C)	01:05	01:48	02:58	03:37	04:21	04:06
Peso vacío (kg)	12,8	18,2	22,9	26,0	30,6	34,8

Accesorios gama SUPERCONFORT / CONFORT

Accesorios gama SUPERCONFORT / CONFORT	Referencia
Percha reposición universal (pedido mínimo 10 uds) - inst. vertical	0020213977
Trípode termos E-SD	0020217193

Dimensiones

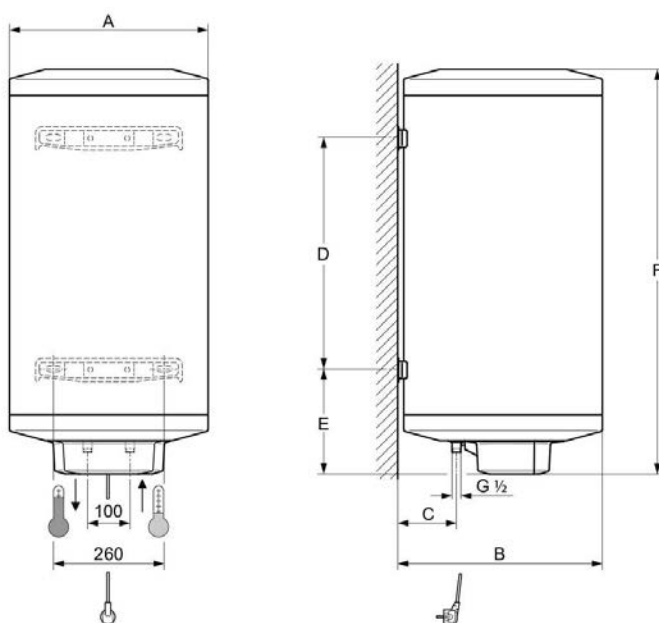

Gama Superconfort

Cota	35 L	50 L	80 L	100 L	120 L	150 L
A	469	469	469	469	469	469
B	483	483	483	483	483	483
C	139	139	139	139	139	139
D	-	183	407	552	702	927
E	321	266	291	287	301	241
F	482	610	859	1.000	1.164	1.329

Gama Confort

Cota	30 L	50 L	80 L	100 L	120 L	150 L
A	353	440	440	440	440	440
B	365	455	455	455	455	455
C	80	125	125	125	125	125
D	-	183	407	552	702	927
E	416	266	291	287	301	241
F	577	610	859	1.000	1.164	1.329

(*) Modelos 35 y 30 sólo instalación vertical.